

Tail Sweep Pro® Installation Instructions

1. Introduction

Tail Sweep Pro is the latest in technology from Polaris that enhances the sweeping flow of the sweephose while preventing squirting from the pool. If you have any questions or if any parts are missing, please call your local Polaris distributor for assistance. For technical assistance, please contact our Technical Support Department at 1.800.822.7933.

2. Installation Instructions

- 1. Turn off the booster pump followed by the filtration pump and remove the cleaner from the pool.
- 2. Remove the existing scrubber from the end of the sweep hose (if present) and discard.
- 3. Ensure there is a wear ring positioned between the orifice tip and the first weight on the sweep hose. If necessary, reposition the first wear ring on the sweep hose so that it is between the orifice tip cap and the first weight, as shown in Figure 1.

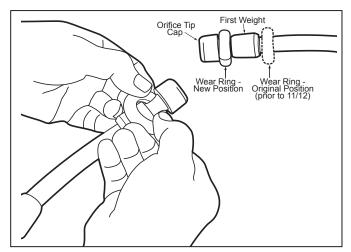


Figure 1. Reposition the First Wear Ring

- 4. Slide the first weight towards the orifice tip cap to loosely capture the first wear ring. See Figure 1.
- 5. Press the Tail Sweep Pro onto the sweep hose assembly until it snaps into place. See Figures 2 and 3.
- 6. Turn on the filtration pump followed by the booster pump, and verify the sweep hose flow moves in a gentle sweeping motion rather than a rapid whipping action. Water should no longer spray out of the pool.




Figure 2. Position the Tail Sweep Pro on the Orifice Tip Cap




Figure 3. Install the New Tail Sweep Pro